



**NEW !**

**SELECTABLE FLOW  
NOZZLE**

# MultiFlow Compact

## PN40 - EN15182-2 certified selectable flow nozzle

- Body in Hard anodized Aluminum
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping a perfect stream quality
- Powerful full cone spray for smothering flames.
- Unbreakable teeth : No maintenance
- **Polyurethane Bumper**: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris ingress (1.5 & 2").



*Leader Nozzles are  
available in 3  
different sizes:*

**Compact**



**Regular**



**Large**



As part of our policy of constant research to improve our products, we reserve the right to modify our products' characteristics at any time without notice

## Characteristics


Models	Item	Weights	Flow rates	Pressures	Inlets
<b>MultiFlow 150 1"</b>	CMFA-0530-LIR	1" BSP F: 1.75kg / 3.85 lbs	20 - 40 - 100 – 150 l/min	6 bar	1" BSP F
<b>MultiFlow 235 1"</b>	CMFA-0531-LIR		40 - 100 - 150 – 235 l/min		
<b>MultiFlow 150 2"</b>	CMFA-0530-EIR	2" BSP M: 1.85kg / 4.1 lbs	20 - 40 - 100 – 150 l/min		2" BSP M
<b>MultiFlow 400 2"</b>	CMFA-0532-EIR		70 - 130 - 230 – 400 l/min		
<b>MultiFlow 400 1.5"</b>	CMFA-0532-MIR	1.85kg / 4.1 lbs	100 - 250 - 350 – 500 l/min		
<b>MultiFlow 500 1.5"</b>	CMFA-0562-MIR		100 - 250 - 350 – 500 l/min		

## Dimensions

For 1" inlet versions: L. 29 x l. 12 x h. 23cm / L. 11.4" x l. 4.7" x h. 9"

For 2" inlet version: L. 31.5 x l. 12 x h. 23cm / L. 12.4" x l. 4.7" x h. 9"

## Curve: Flow vs Pressure

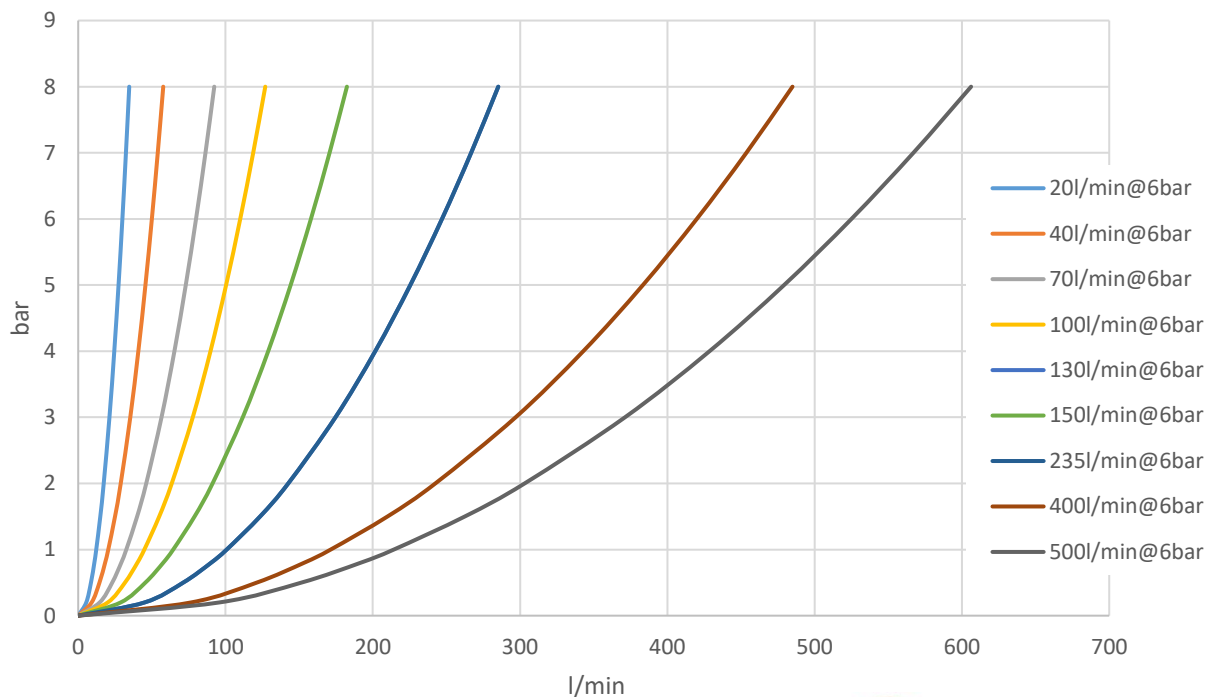

## Options

All coupling types

Foam adapter

Coloured (red, blue, yellow, orange) flow control handle and pistol grip covers

MultiFlow are delivered as standard with red covers



## Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.

ZF.01.290.EN.5