



AUTOMATIC NOZZLE

FLOWMATIC Large

EN15182-2 type 4: automatic nozzle

- Body in hard anodized Aluminum
- Wide flow handle and wide ring for flush setting
- Adjustment of the full jet to the optimal spray angle in 155°
- Stainless steel ball valve
- Powerful full cone spray for smothering flames.
- Unbreakable rubber teeth: **No maintenance**
- **Polyurethane Bumper:** resistant to high temperatures, hydrocarbons and aggressive chemicals
- **Double Grip** model: Flowmatic PA



**Leader Nozzles are
available in 2
different sizes:**



Compact




Large



CHARACTERISTICS

	FLOWMATIC 1000 Single grip	FLOWMATIC 1000 PA Double grip
Model		
Item number	LFMA-0525-OIB	LFMA-2525-JIB
Weights	3.350 kg	3.600 kg
Dimensions	L. 35 x W. 13 x H. 26cm	L. 37 x W. 32 x H. 17cm
Flowrates	300 to 1000 l/min	
Pressures	6 bar	
Inlet	2.5" BSP F	
warranty	5 year	

CURVE: FLOW VS PRESSURE

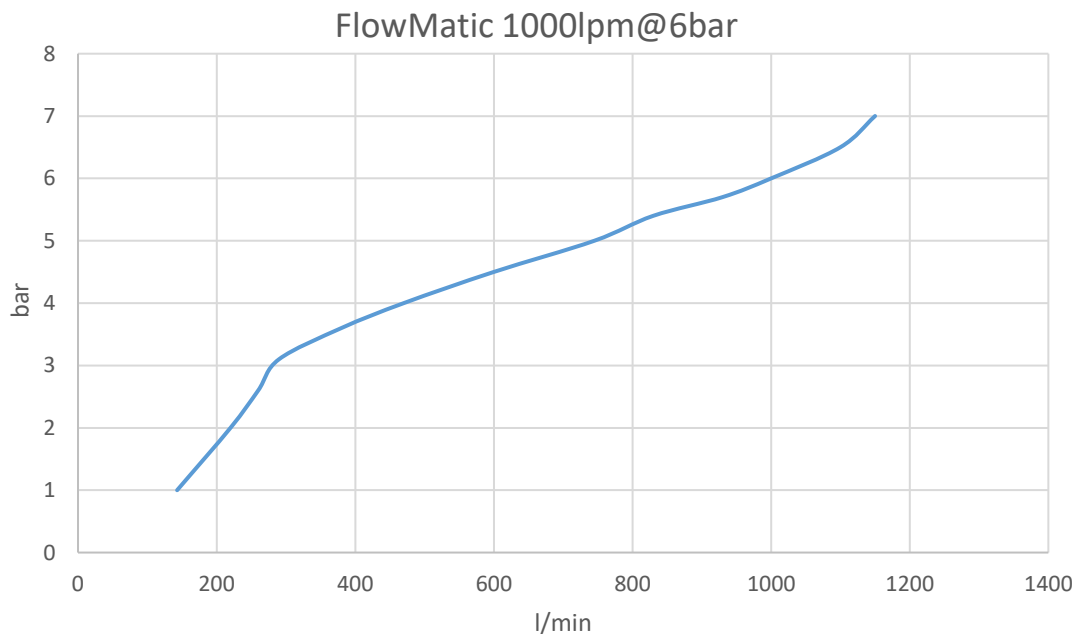

OPTIONAL ACCESSORIES

All coupling types

Foam adapter

Coloured (red, blue, yellow, orange) flow control handle and pistol grip covers (FlowMatic are delivered as standard with blue covers)

REDUCED COST OF OWNERSHIP

Very light maintenance requirement due to the nozzle design and materials used.

ZF.01. 337.EN.2