



LEADER TIC 4.3

High Resolution Thermal imaging camera

Efficient and versatile = 3 buttons + 4" display

Particularly suitable for the First attack. LEADER TIC 4.3 offers unbeatable value and best quality, combined with all important features: ideal for firefighting, first attack, search for missing persons and fire...




Outstanding features:

- Compact 175 x 145 x 97 mm
- Lightweight 990gr with 2 batteries and side straps.
- Large 4" display for detailed visibility
- Widest detection range: -40°C to +1150°C
- Video recording, picture capture and image freeze
- Batteries: 6 year warranty, 5000 charging cycles
- Safe batteries (LiFePO4): for high temp operations
- With ECO BOOST System for extended running time
- Up to 8h running time (2 batt.) with Eco-Boost-System
- Removable Pistol grip option
- Boot time: less than 5 sec
- 3 Large buttons: easy to operate even with gloves
- Functions:
 - ON/OFF
 - Zoom x2 x4
 - Colorization selection (3 or 5 modes)
 - Image freeze / picture capture (option)
 - Video recording (option)
 - Replay picture and video on screen
 - Laser pointer (option)



Colour schemes:

LEADER TIC 4.3 offers 3 colour schemes as standard: Fire, Search, and Inverse +2 colour schemes as option: Cold Finder and Multicolour




FIRE:
 Dark Red >850°C
 Red > 675°C
 Orange > 500°C
 Dark Yellow >350°C
 Yellow > 200°C
 White = Hot
 Black = cold



SEARCH:
 2 hottest % coloured in Red and the 5 following hottest % in Yellow-Orange.



COLD Finder:
 Blue colour for coldest areas



INVERSE:
 Same as Fire scheme but White & Black are inversed:
 White = Cold
 Black = Hot



MULTICOLOUR:
 For Industrial applications

3 Sensitivity modes with automatic switch according observed scene:

- High sensitivity temperature range: -40 +150°C
- Medium sensitivity temperature range: -40 + 500°C
- Low sensitivity temperature range: -40 +1150°C

Characteristics:

Leader TIC 4.3 with Eco-Boost-System		General	
Dimensions	L.175 x W.145 x H.97 mm (H = +110mm with optional pistol grip)	Rechargeable batteries	LiFePO ₄ (Lithium Iron Phosphate = safety VS fire), 2.5Ah at 6.6V, 85g
Weight	990g with 2 batt / 905g with 1 batt (+170g with optional pistol grip)	Running time (20°C) with Eco-Boost-System since October 2018	Without video/photo functions: >8h (2 batt) / >4h (1 batt) With video/photo functions: >6h (2 batt) with non-active video >5h (2 batt) with recording video
Display	4" LCD / 320 x 240 (76.800) px / Backlighted / Brightness: 800 cd/m ²	Boot time	< 5 seconds
Frequency	60Hz Fps	Charging voltage	12 / 24 VDC or 100-240 VAC
T°C Range	-40° to +1150°C	Charging time (for 2 batt. / consider half for 1 batt.)	Charging bay: ~2h Mains charger: 100% in ~2h, 90% in ~1h30, 80% in ~1h20
Colorization	Std: Fire, Search, Inverse Option: Cold finder and Multicolour	Charging cycles	> 5000
Housing		Memory (optional)	8GB internal SD card (8h video or 1000 pics)
Material	PUR / Elastomer	Warranty	5 years on camera / 6 years on batteries / 10 years on thermal sensor / 1 year on accessories (chargers, charging bay, etc...)
Drop Test	2m on concrete	Options	
IP	IP67 / 1 Meter 30 Minutes	Removable pistol grip	Picture capture and/or video recording (8GB capacity)
Heat resistance	150°C for 15min / 260°C for 5min	Neck strap in flame retardant material	Vehicle charging bay or mains charger
Sensor		1 or 2 Retractable lanyards	Carrying case IP67
Micro bolometer type	Uncooled 17µ Amorphous Silicon aSi Resolution 384 x 288 (110 592 px)	Protection hood	Wireless video transmission to computer, tablet or smartphone
Spectral range	7 – 14 µm		
Thermal sensitivity	NETD: <50mK (<0.05°C)		
Optic			
Material	Germanium Carbon Coated Protected by a germanium window		
Focus	0,35m to infinity / F/1.3 speed		
Visual field / FOV	H: 51° / V: 40° / Diagonal: 65°		



Energy concept


LiFePO₄ batteries (lithium-iron-phosphate).

Benefits:

- Very long lifespan guaranteed 5000 charging cycles (~10 years)
- Operating time (8h with 2 batteries at the same time in the camera)

Picture capture & Video recording

- Pictures (up to 1000) and Video (up to 8h) can be:
- viewed on the camera screen during operation
 - Live Pictures can be sent to a computer, tablet or smartphone thanks to optional wireless stick.
 - Downloaded into a computer via a USB cable

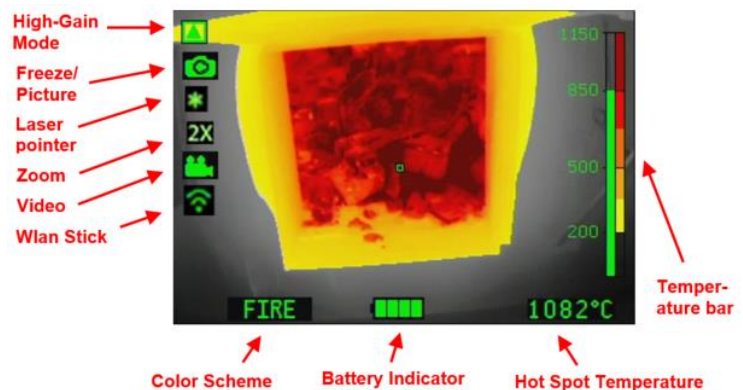

Vehicle Charging Bay

Very space-saving mountable! Power supply 12/24 VDC or 100-240 VAC. Can charge up to 4 batteries at the same time (2 in the camera and 2 spares)



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.
ZF.07.325.EN.5















Camera standard features:

Description	Colour modes			Features							
	Color modes	Optional color modes	Max color modes	Battery	Freeze mode	Side trap	Video recording	Picture capture	Laser	Zoom	USB cable
LEADER TIC 4.3	Fire & Search & Inverse	Multicolour or Cold	5	2	√	2				√	
LEADER TIC 4.3 L			5	2	√	2			√	√	
LEADER TIC 4.3 V			5	2	√	2	√	√		√	√
LEADER TIC 4.3 VL			5	2	√	2	√	√	√	√	√

V= Video + Picture

L = Laser

Camera optional accessories:

	Wireless Transmission kit	Only compatible with cameras equipped with Video recording		Vehicle charging bay with additional slots	Charge batteries in the camera + 2 extra spare batteries
	Pack of 2 spare batteries			Power supply for charging bay	Exist in 12/24V and 100V-240V with US or EU plug
	Cable charger for TIC 3 & 4	Available in 12/24V or 100V-240V		Retractable lanyard	500gr or 1000gr tension force
	Watertight Carrying case	IP67		Neck strap	Fire-proof (Kevlar)
	Vehicle charging bay	Charge batteries inside the camera		Protection hood	Increases exposure time x2 to high temperatures
	Laserpointer	Only for 3.3 and 4.3 models		Removable pistol grip	Pistol grip = 170g Incl. mounting tool



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.
ZF.07.325.EN.5