



**NEW !**

**MONITOR  
NOZZLE**

# MultiFlow 3000

**Monitor nozzle EN15-767 compliant**

Superior Stream quality: Wide Fog pattern for good thermal protection

## MultiFlow: Selectable flow monitor nozzle

- Flow rate:
  - From 500l/min to 3000l/min
  - increments of 500 l/min
  - Calibration at 6 bars
- The wide fog jet ensures a perfect protective screen.
- The polyurethane bumper is resistant to high temperatures, to hydrocarbons and chemicals.
- Inlet 2"1/2 BSP




## Characteristics

Model	Item number	Dimensions	Weight	Flowrate @ 6bar
MultiFlow 3000	CDA-040-OI	H:23.8 cm (Spray position) H: 26.4 cm (Straight stream) x Diam:15 cm	3.8 kg	500-1000-1500-2000- 2500 & 3000 lpm

As part of our policy of constant research to improve our products, we reserve the right to modify our products' characteristics at any time without notice

## Performances

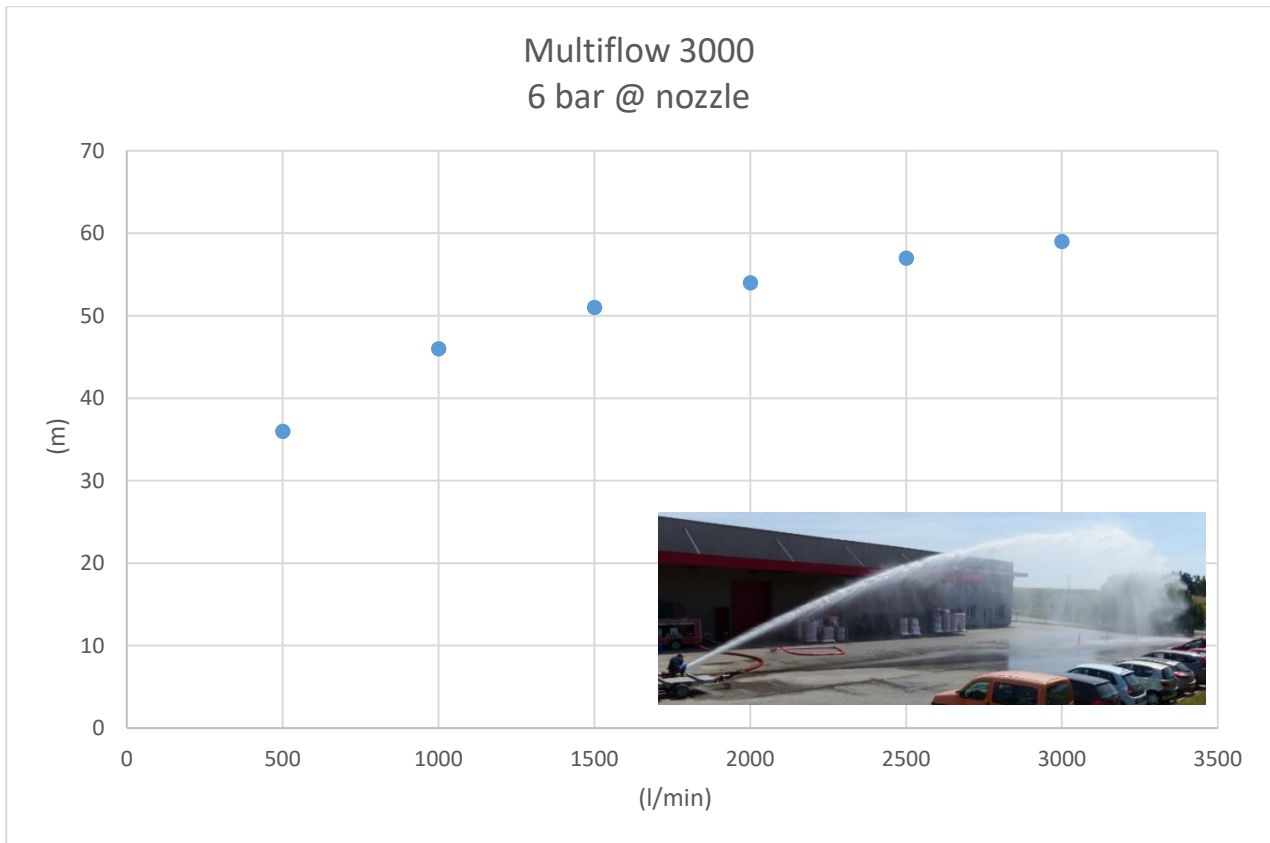

The Wide fog pattern forms a very effective protective shield.



### Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



ZF.02.363.EN.1